


800er Opti Mix 2K High-pressure system

- ▶ Processing of 2c material, filled and unfilled
- ▶ High and low-pressure processing
- ▶ Movable by hand; craneable
- ▶ Front swivel castors with brakes; fixed castors at the rear
- ▶ Lateral hose holder can be used on left or right side
- ▶ Automatic tank refilling (optional refilling station) or manual refilling possible
- ▶ Operation of the system via touch-display

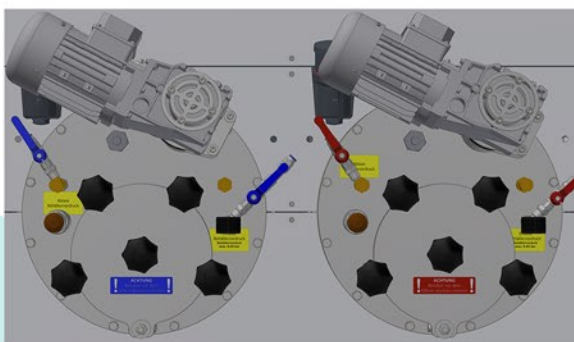

Technical data*:

- ▶ Discharge amount approx. 0,5 - 10 l/min
- ▶ Mixing ratio from 10 : 100 to 100 : 10
- ▶ PLC with display, permanent control and monitoring of quantity, mixing ratio, temperatures, pressure and tank levels
- ▶ Frequency-controlled drives / pump systems, pulsation-free
- ▶ Volume flow meter for material quantity recording
- ▶ Pressure monitoring with safety shut-off
- ▶ 2 stainless steel tanks with 60 l or 40 l filling volume, heated or unheated, with or without agitator
- ▶ Hose package, heated or unheated, 25 meters long (special length on request)
- ▶ Spray gun with static mixing system or countercurrent injection

*Technical data depending on material and temperature